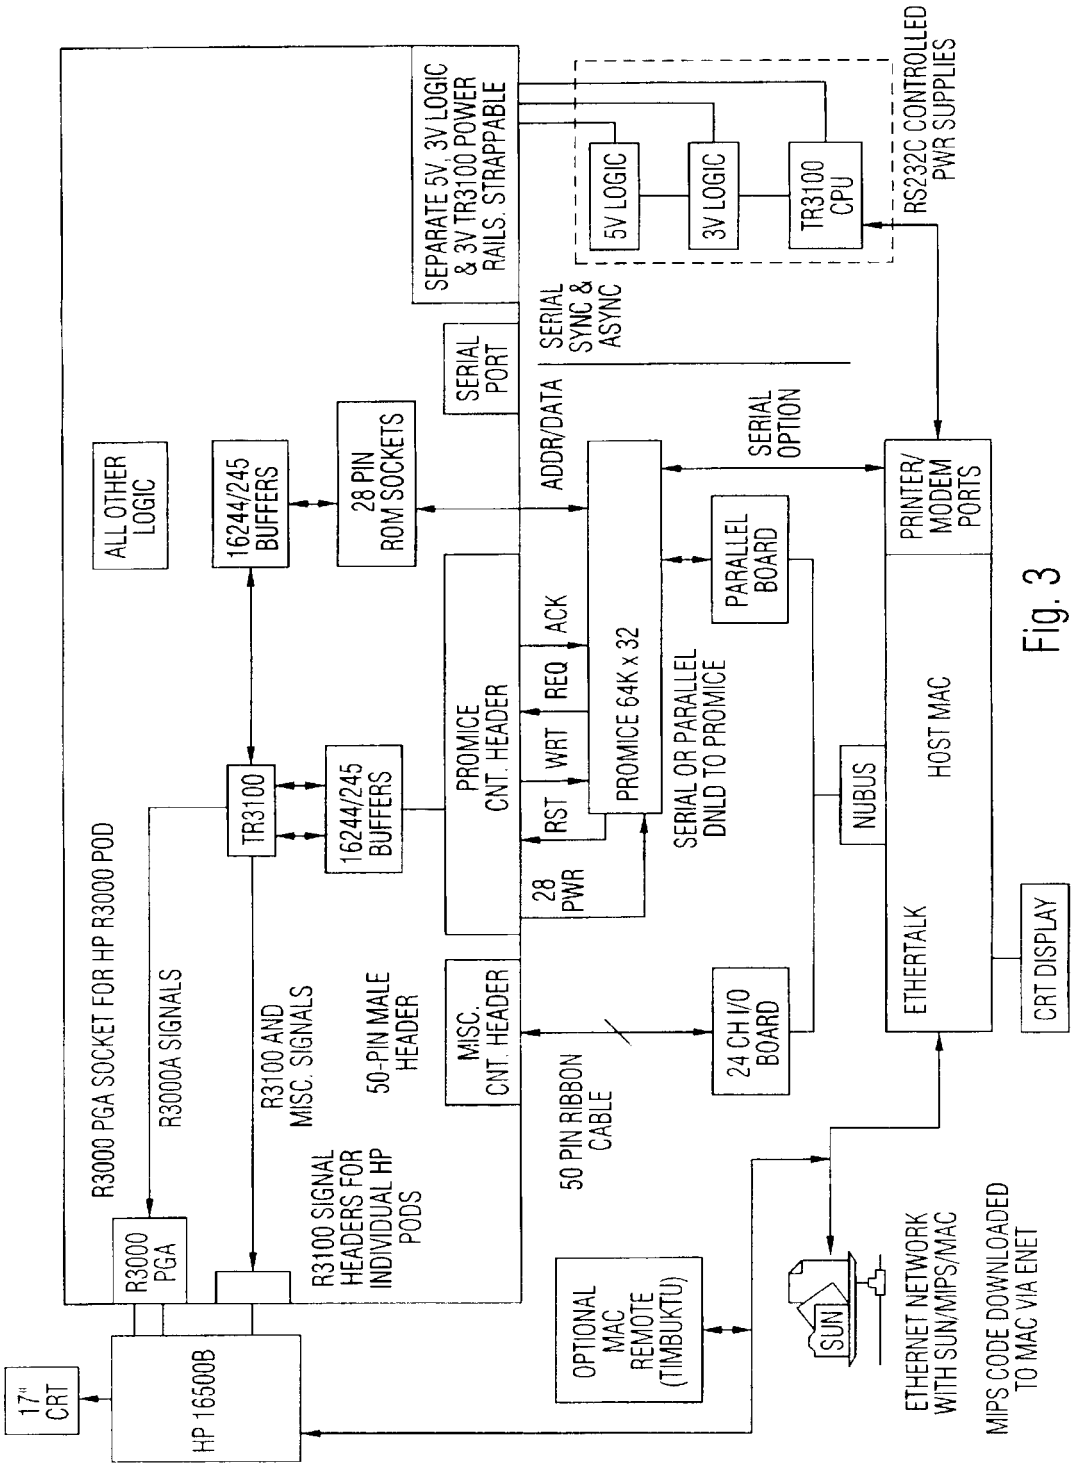
R3000 PGA SOCKET FOR HP R3000 POD
R3000A SIGNALS
R3100 AND MISC. SIGNALS
R3100 SIGNAL HEADERS FOR INDIVIDUAL HP PODS
50-PIN MALE HEADER
R3000 PGA
TR3100
HP 16500B
17" CRT
ALL OTHER LOGIC
16244/245 BUFFERS
16244/245 BUFFERS
28 PIN ROM SOCKETS
PROMICE CNT. HEADER
MISC. CNT. HEADER
SEPARATE 5V, 3V LOGIC & 3V TR3100 POWER RAILS. STRAPPABLE
SERIAL PORT
ADDR/DATA
ACK
REQ
WRT
RST
28 PWR
PROMICE 64K x 32
SERIAL OR PARALLEL DNLD TO PROMICE
50 PIN RIBBON CABLE
24 CH I/O BOARD
OPTIONAL MAC REMOTE (TIMBUKTU)
5V LOGIC
3V LOGIC
TR3100 CPU
RS232C CONTROLLED PWR SUPPLIES
SERIAL SYNC & ASYNC
SERIAL OPTION
PARALLEL BOARD
NUBUS
PRINTER/ MODEM PORTS
HOST MAC
ETHERTALK
CRT DISPLAY
SUN
ETHERNET NETWORK WITH SUN/MIPS/MAC
MIPS CODE DOWNLOADED TO MAC VIA ENET

Fig. 3